



## FT SERIES AGITATED FLUFF STORAGE TANKS

AEC agitated fluff storage tanks are designed with heavy-duty agitators to handle the hardest to feed materials. Sizes range from 50 to 200 cu. ft. capacity.



Model FT 50 (shown with optional cyclone)

### STANDARD FEATURES

- Rectangular heavy-duty round bottom design
- Cleanout access door
- Slow speed gear reduction drive agitator
- Tank-mounted controller
- Fluff conveying blower
- Lexan® cover over auger discharge chute
- Mechanical high level switch with warning light
- 230/1/60 agitator operating voltage
- 460/3/60 blower operating voltage


### OPTIONAL FEATURES

- Special voltage
- Photo cell level switch with delay timer in lieu of mechanical
- Special cyclone hole in cover
- Diverter valve and controls to feed 2 extruders

## SPECIFICATIONS

Model	Capacity, cu. ft. (l)	Discharge auger dia. OD, in. (mm)	Auger drive DC, HP (kW)	Agitator drive DC, HP (kW)	Discharge blower, HP (kW)	Blower tube dia. OD, in. (mm)	Length, in. (cm)	Width, in. (cm)	Height, in. (cm)
50-4	50 (1415)	4 (101.6)	0.5 (0.373)	0.75 (0.559)	2 (1.492)	4 (101.6)	54 (137)	36 (91)	69 (175)
100-6	100 (2832)	6 (152.4)	0.75 (0.559)	1 (0.746)	5 (3.730)	4 (101.6)	54 (137)	36 (91)	87 (221)
200-6	200 (5663)	6 (152.4)	1 (0.746)	2 (1.492)	5 (3.730)	4 (101.6)	54 (137)	36 (91)	150 (381)

## TYPICAL CONFIGURATION

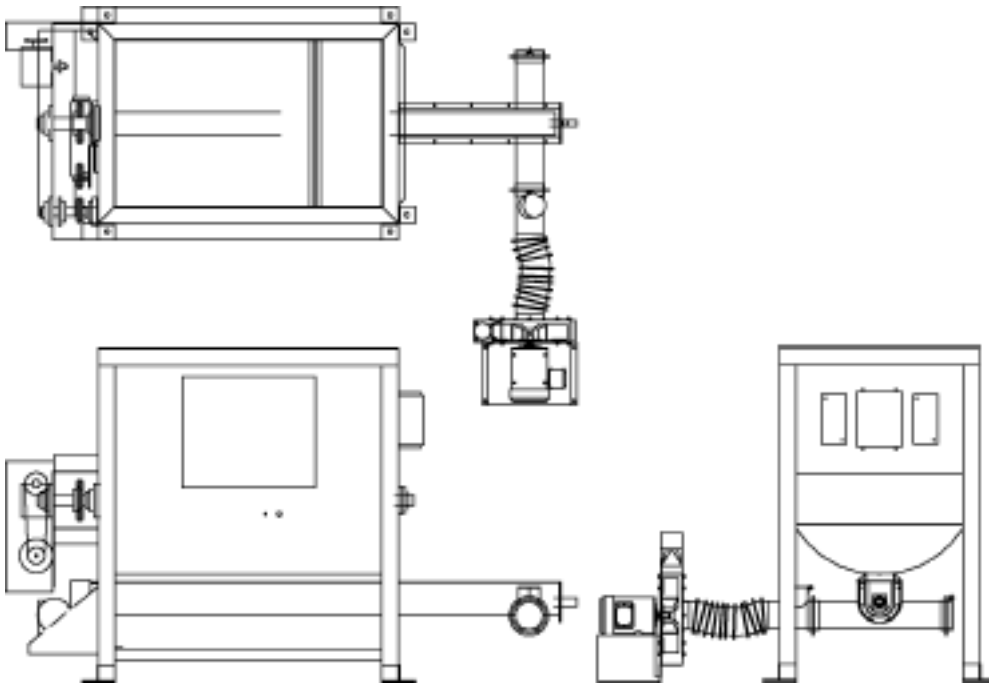

## TYPICAL FLUFF TANK WITH RECLAIM SYSTEM

